


Texas Instruments Speak & Spell:  
 Talk can be cheap (ZX-81)  
 Speak-2-Me-2 TM PC Card (TRS-80)  
 Speak uP Software (6502)  
 Links

Talk can be cheap

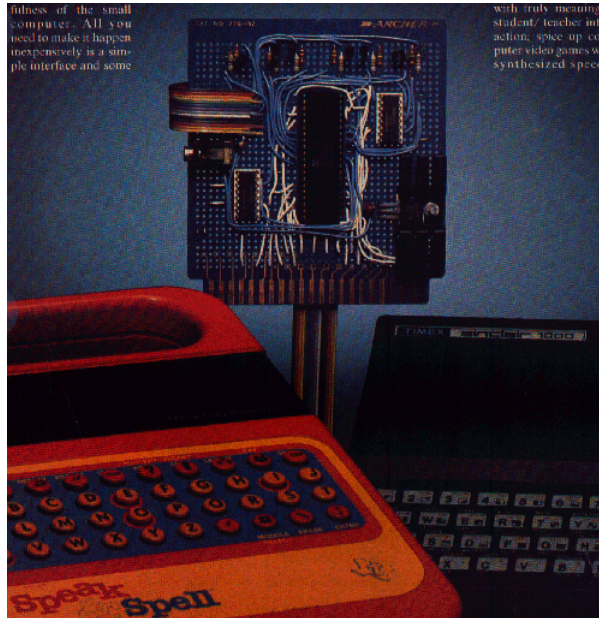

- Talk can be cheap by Larry Dighera, published in Computers & Electronics, Februari 1983
- Hundreds of words can be "spoken" by a Sinclair or Timex computer when adding an interface and a "Speak & Spell"


TALK CAN BE CHEAP

- A "talking" computer is not necessarily expensive - not if you mate one of the low-cost computers (Sinclair ZX-80, ZX-81, or Timex 1000) with Texas Instruments popularly priced "Speak & Spell" learning device. The combination give you several hundred clearly articulated words that expand the usefulness of the small computer. All you need to make it happen inexpensively is a simple interface and some software, all described here. Using these ideas, you might design a lowcost security/firealarm that vocalizes the nature of a problem ("Fire", "Theft", etc). You could also enhance your computer's portability by making its output audible instead of displaying it on a video screen; write educational programs with truly meaningful student/teacher interaction; spice up computer video games with synthesized speech; create useful programs for the visually impaired; etc. Here's how it can be done.

System Overview.

- The Speak & Spell consists of a pushbutton keyboard, microprocessor, display, ROM (contains speech data), voice synthesizer, and loudspeaker. A block diagram of the system is shown in Fig. 1. The microprocessor communicates with the speech units through a 6-line bus with CNTL 1, 2, 4, and 8 forming a 4-bit data bus and PDC (processor data clock) and CS (chip select) forming a control bus. The control commands used in the Speak & Spell are listed in Table I.  
 The ROM contains the binary-coded speech data for synthesis of the spoken word. Each word has a specific starting address. When it is desired to output a particular word, the ROM address of the beginning of the word is sent to the voice synthesizer in five 4-bit nybbles, preceded by the LOAD ADDRESS (code 2) command. The data is then clocked into the voice synthesizer by the PDC signal. Once the 5-nybble word address is loaded, READ ROM (code 8) and SPEAK (code 10) commands are sent to cause speech to be generated. If the BUSY SPEAKING? (code 14) command is now sent, the voice synthesizer will raise the CNTL 1 line high until it finishes vocalizing.  
 A schematic of the interface circuit between the computer and Speak & Spell is shown in Fig. 2. The microprocessor in the Speak & Spell uses PMOS devices that operate at -21 V. (A typical I/O line is shown within the processor.) Because PMOS uses passive pulldown resistors, output current is limited. If ground potential is impressed on these lines, no harm will result, regardless of their state. The Z80A Parallel Input/Output (PIO) chip in the interface used for IC1 provides two bidirectional I/O ports: port A uses CMOS inverters (IC2) and open-collector pnp driver transistors (Q1 through Q6) as the outputs. The emitters of these drivers are connected to the +5-volt line, which is also connected to the positive (COM) of the Speak & Spell. Thus, when a transistor is conducting, the S&S MPU "sees" a logic 1 (0 V); when the transistor is off, the PMOS pulldown resistors bring the line to logic 0.  
 Port B of the PIO is used for input and receives its signal from R7 through R12, which limit the incoming signal from the Speak & Spell. In addition to interfacing with the Speak & Spell, with appropriate software, the PIO can propability for the computer, allowing use of joysticks and such functions as music, control, and process monitoring.


Fig. 1 Blockdiagram of the Speak & Spell with the interface and ZX-81-computer

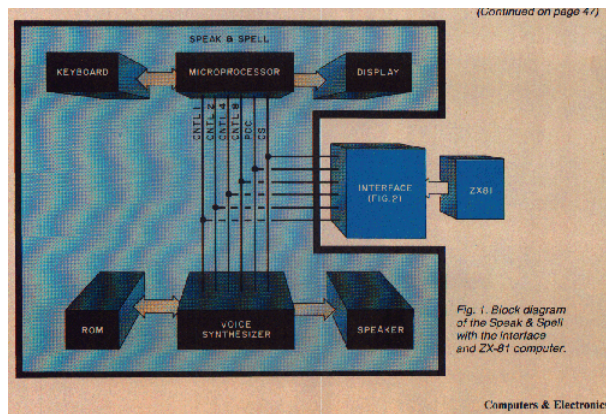

#### Construction.

- The circuit can be built on a dual 22-contact card similar to the Radio Shack No. 276-154. If you use the same edge-contact arrangement as in the computer, except for the clock line, the card is compatible with ZX bus expansion cards currently available. Use of sockets for the ICs and a miniature phone jack to interconnect the power supply are recommended. The Speak & Spell draws about 200 mA and the interface about 70 mA at 5 V. If you are using a 16K RAM extension, the larger power supply can handle the extra load. Arrange switching so that both computer and interface power up at the same time. If you elect to use batteries in the Speak & Spell, disconnect the ground line by opening the jumper (see Fig. 2). Recheck the interface circuit before connecting it to the computer. To make the connections to the Speak & Spell, carefully remove the back plate and locate the 40-pin microprocessor immediately below the display. Pin 1 is in the lower righthand corner. Connections are made to pins 10 through 14, 36, 38, and the negative terminal of the battery. (Continued on page 47)
- (Continued from page 40) tery. Use fine insulated wire to make these connections and work very carefully to avoid creating short circuits. The nine leads can be terminated in a 14-pin DIP socket, with the cable brought out through the battery compartment. Slip a short length of heatshrinkable tubing over each wire before soldering it to the DIP socket. Then shrink it over the soldered connection. The interface is wired to the Z80 microprocessor in the computer as shown in Fig. 2.

Fig. 2 Schematic diagram, Table III Machine Code and Parts List

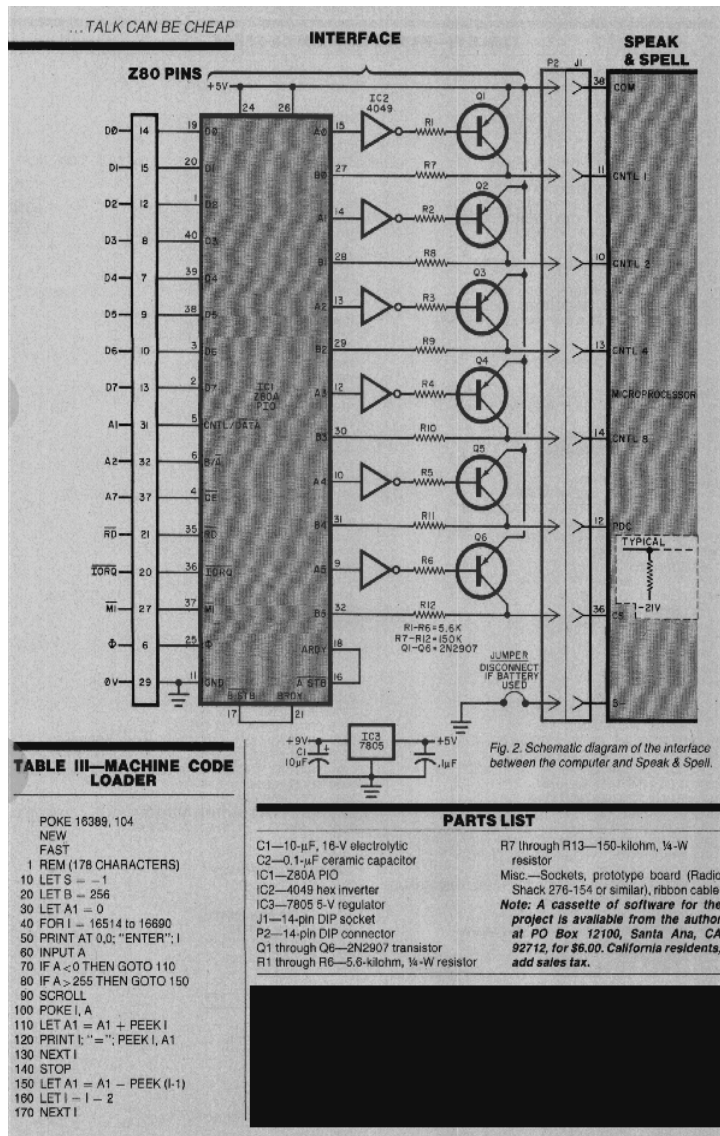

software.

- Because it is necessary to supply the voice synthesizer with data at a rate beyond the capability of the BASIC interpreter built into the computer, machine language must be used during programming. The programming code given in Table II covers six program modules. The first, labelled PIO, is the initialization routine for the Z80 PIO chip (IC1). When power is first applied to the system, the PIO is in an inactive state and must be initialized (told what to do) before it can be used. The listing in Table II can be entered into the computer using the BASIC program shown in Table III. The three lines without numbers at the beginning of the program are keyed directly into the machine to reserve the top 6K of RAM for the remainder of the program. After entering Table III, run it and enter each number shown in the decimal code column of Table II, referring to the check sum as you go. If an error is detected, use B to move back. Moving forward without altering the data that has already been entered may be accomplished by entering S (for skip).

Table II-Machine Code List

TABLE II—MACHINE CODE LIST					
Address	Label	Mnemonic	Code Decimal	CK Sum	Comment
16514	PIO	LD A,207	62,207	62	Mode control word (Mode 3)
16516		OUT (3),A	211,3	480	Mode control word to PORT A control register
16518		LD A,192	62,192	545	Data direction word bits 0-5 — out,5,6,7 — in
16520		OUT (3),A	211,3	948	Data direction word to PORT A control register
16522		LD A,207	62,207	1013	Mode control word (Mode 3)
16524		OUT (7),A	211,7	1431	Mode control word to PORT B control register
16526		LD A,255	62,255	1500	Data direction word all bits input
16528		OUT (7),A	211,7	1966	Data direction word to PORT B control register
16530		LD A,7	62,7	2035	Interrupt control word: disable interrupts
16532		OUT (3),A	211,3	2253	Interrupt control word to PORT A control reg.
16534		OUT (7),A	211,7	2467	Interrupt control word to PORT B control reg.
16536		RET	201	2675	Return
16537		NOP	0,0,0,0	2675	No Operation
16541	SPEAK	LD HL,0,104	33,0,104	2708	Set NYBL pointer to RAMTOP
16544	AAA	LD BC,0,5	1,0,5	2813	Set NYBL counter — 5
16547		IN A,PORT B	219,5	3037	Get current state of synthesizer bus
16549		ADD A,0	198,0	3240	Set zero flag if no data present
16551		JR Z,AAA	40,250	3290	Wait until data present
16553	BBB	IN A,PORT B	219,5	3749	Get current state of synthesizer bus
16555		ADD A,—8	198,248	3952	Wait until bus clear (CNTL B.)
16557		JR Z,BBB	40,250	4240	Loop until bus clear
16559		LD A,CS	62,32	4552	Get Chip Select/reset word
16561		CALL_PDC	205,236,64	4786	Clock in reset
16564		ADD A,2	198,2	5287	2 = "LOAD ADDRESS"
16566		CALL_PDC	205,236,64	5494	Clock in "LOAD ADDRESS" command
16569		SUB,2	214,2	6008	Remove command
16571	CCC	ADD A,(HL)	134	6144	Get NYBL
16572		CALL_PDC	205,236,64	6349	Clock in NYBL
16575		SUB,(HL)	150	6799	Remove NYBL
16576		INC,HL	35	6834	Increment NYBL pointer
16577		DJNZ,CCC	16,241	6850	Loop if less than 5 NYBLs
16579		ADD A,8	198,8	7289	8 = "READ ROM"
16581		CALL_PDC	205,236,64	7502	Clock in "READ ROM" command
16584		ADD A,2	198,2	8000	10 = "SPEAK"
16586		CALL_PDC	205,236,64	8207	Clock in "SPEAK" command
16589		ADD A,4	198,4	8705	14 = "BUSY?"
16591		CALL_PDC	205,236,64	8914	Clock in "BUSY?" command
16594		LD A,CS	62,32	9276	0 = "RESET" command
16596		CALL_PDC	205,236,64	9513	Clock in "RESET" command + CS
16599	DDD	IN A,PORT B	219,5	10032	Get synthesizer bus status
16601		BIT 0,A	203,71	10240	Check bit 0 = 0
16603		JRNZ,DDD	32,250	10343	If bit 0 ≠ 0, then still speaking, so loop
16605		LD A,CS	62,32	10555	0 = "RESE"
16607		CALL_PDC	205,236,64	10892	Clock in "RESE" + chip select
16610	OFF	LD A,0	62,0	11254	0 = off
16612		OUT PORT A,A	211,1	11465	Turn off PORT A
16614		RET	201	11667	Return
16618		NOP	0,0,0,0	11667	No operation
16620	PDC	OUT PORT A,A	211,1	11878	Send data to synthesizer
16622		CALL_DELAY	205,5,65	12084	Set up time
16625		ADD A,PDC	198,16	12352	16 = Processor Data Clock
16627		OUT PORT A,A	211,1	12579	Set clock high
16629		CALL_DELAY	205,5,65	12785	Clock pulse width
16632		SUB 16	214,16	13069	Remove Processor Data Clock
16634		OUT PORT A,A	211,1	13296	Let clock fall
16636		CALL_DELAY	205,5,65	13502	Hold time
16639		RET	201	13773	Return
16640		NOP	0,0,0,0	13773	No operation
16645	DELAY	PUSH,BC	197	13970	Save NYBL counter
16646		LD C,21	14,21	13964	Initialize delay-loop counter
16648	EEE	DEC C	13	14018	Reduce delay-loop counter by 1
16649		JRNZ,EEE	32,253	14050	Loop until time-out
16651		POP,BC	193	14496	Retrieve NYBL counter
16652		RET	201	14697	Return
16653		NOP	0,0,0,0	14697	No operation
16658	STODATA	LD HL,108	33,0,108	14730	Set data pointer to storage address
16661		LD C,5	14,5	14852	PORT B data register address
16663	FFF	IN A,PORT B	219,5	15076	Get current state of synthesizer bus
16665		CP 50	254,50	15335	50 = CS + PDC + "LOAD ADDRESS" command
16667		JRNZ,FFF	32,250	15417	Loop until 50 present
16669	GGG	INI	237,162	15904	Send bus data to storage & increment pointer
16671		LD A,129	62,129	16128	129 = 2's complement of 32512
16673		ADD A,H	132	16389	Test if H byte = 32512
16674		JRNZ,GGG	32,249	16421	Loop until H byte = 32512
16676		RET	201	16687	Return
16677		NOP	0 x 14	16687	No operation
16690					End of REM statement

Table I-voice synthesizer control commands

- Code Use Input/Output
- 0 RESET Input
- 2 LOADADDRESS Input
- 4 PLACE VOICE DATA Output ON BUS
- 6 SPEAK SLOWLY Output
- 8 READVOICEDATA Input FROM ROM
- 10 SPEAK Output
- 12 BRANCH Input
- 14 BUSY SPEAKING? Output

At this point, it is possible to test operation of the PIO by entering the following:


- POKE 26624,62 ;LD A, data
- POKE 26625,0
- POKE 26626,211 ;OUT port A,A
- POKE 26627,1
- POKE 26628,201 ;return

Now enter:

```
1000 PRINT USR 16514
1010 INPUT A
1020 POKE 26625,A
1030 PRINT USR 26624
1040 GOTO 1000
```

Table IV-Basic Program ZX-Speak




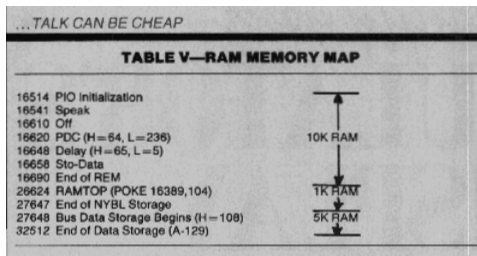

Conclusion.

- Only the basics of using the Speak & Spell vocalizer with Sinclair and Timex computers have been discussed here. There are many things you can do with the system beyond what we've presented. For example, you can locate the addresses of individual word sounds (phonemes) contained in ROM and string them together to make words that don't exist in the ROM's vocabulary, making it possible to build an almost unlimited dictionary of words. You might trim the prefix from the word "anything" to obtain "thing" simply by locating and using the starting address of the suffix. Another approach to obtaining a larger vocabulary is by adding more ROMs to the system. Currently, as many as 16ROMs can be connected into the system, each individually accessed through the address-decoded ROM chip select. Access to data output from the ROMs is available at the Speak & Spell's edge connector. The more you use the system, the more you're likely to learn about it. As you experiment with it, you may discover many features of the Speak & Spell we haven't covered here. You may even crack the word-encoding scheme.


I won't talk in class

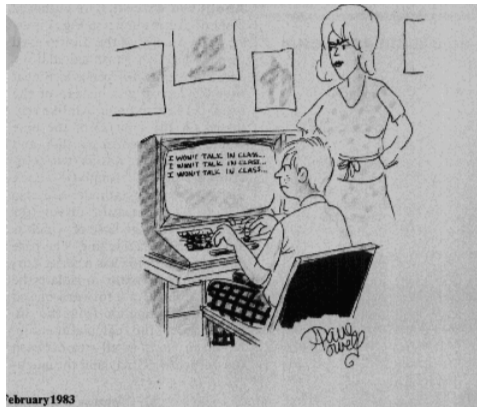

Infosheet by PERCOM DATA COMPANY, INC.  
Give your TRS-80\* computer the gift of speech.

Speak-2-Me-2™: The Inexpensive PC Card that Makes a TI Speak & Spell the Voice of Your Computer.

Speak-2-Me-2™

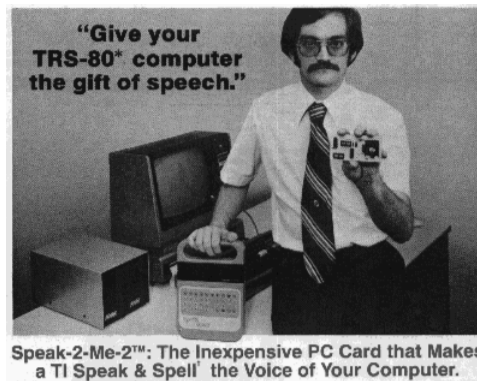

- Install Speak-2-Me-2™ in a Speak & Spell. Hook up your computer. And like a transplanted larynx Speak & Spell becomes your computer's own voice. Now you can add the ultimate to your business and game programs: the incredible dimension of near-human speech.
- Listen as your system instructs, commands, implores as it articulates phrases and whole sentences composed from the extensive vocabulary of Speak & Spell. And think of the applications! In the classroom, for example, suggesting, persuading . . . praising to reward a

correct response. Or in a manufacturing environment where clear, crisp commands prompt and warn. Or maybe in a customer-stopping voice-visual display? And of course the possibilities for enlivening your computer games with snappy remarks are endless.

- The "built-in" vocabulary of a Speak & Spell includes well over 200 words plus phrases such as "say it" and "you win" as well as letter and number pronunciations. Moreover, Speak & Spell is designed to accommodate snap-in speech modules that enhance the built-in word list. The speech driver program provided with Speak-2-Me-2™ lets you inject any of these expressions, or whole sentences composed of Speak & Spell vocabulary words, at any point in your application program.
- But that's not all. An optional advanced speech driver lets you create new, non-vocabulary words by joining parts of words from the Speak & Spell word list. For example, "Percom" may be formed from the phrase perfect score and the word comfort: You can also modulate the speed that words are spoken with the advanced driver. And as a bonus, the advanced speech driver diskette includes eight talking game programs. Just a sample of what can be done when your computer talks! The advanced speech driver works with the TRS-80\* computer.
- The bottom line? For a small fraction of what you would otherwise have to pay you can add not just speech capability but an exceptional, near-human sounding voice to that dumb box of electronics called a computer.

#### Speech driver software

- Listed in the Speak-2-Me-2™ users manual is a 28-line Level II BASIC program for the TRS-80\* computer that installs a utility-level speech driver as a Disk BASIC user (USR) function. Key in this short program and you can output whole sentences with a few BASIC lines. However, for more versatility in speech composition, we also offer an advanced speech driver (ASD). This optional, self-loading program, which is supplied on diskette, extends a Speak & Spell vocabulary by allowing you to form words from the word parts of the Speak & Spell word lists. The ASD program also lets you output words at half the normal enunciation speed. Besides these functions, the ASD provides a speech driver comparable to the utility-level driver installed by the BASIC program listed in the users manual. All of the ASD routines are implemented as callable drivers, that is, control is passed from your Level II BASIC application program via a user (USR) function.

#### Real word games

- Included on the ASD diskette are eight "talking" games. There's the old standby, Hangman. Games of chance A perfidious SimonSays. And more. Still, these are just a hint of the potential of your "talking computer."

You install it. Or, we do.

- The Speak-2-Me-2™ printed circuit module installs in the battery compartment of a Speak & Spell, and some user modification of the Speak & Spell is required. Although the installation is straightforward, if you are not "into" electronics, or don't have a friend who is, we will install a Speak-2-Me-2™ in a Speak & Spell that you provide. The Speak & Spell must be unmodified and functioning properly. The installation fee is \$25.

#### Includes interconnecting cable

- An interconnecting cable for a TRS80\* Model I or Model III computer is supplied with Speak-2-Me-2™. The cable plugs into the Speak-2-Me-2™ module and exits the Speak & Spell via the battery access opening it connects to the computer. The Speak-2-Me-2™ interconnecting cable may be modified for other computers


#### The price is right

- Speak-2-Me-2™ costs only \$69.95, including the interconnecting cable and a comprehensive users manual with BASIC source listings of the utility-level speech driver and application examples. The price does not include a Speak & Spell, which you must furnish, and since the Speak-2-Me-2™ module installs in the Speak & Spell battery compartment, you also must provide an external power source. Most calculator power packs are suitable. Or, you can use a battery. The advanced speech driven games diskette sells for just \$29.95.

#### System Requirements


- To use the Speak-2-Me-2™ as configured, you will need a TRS-80\* Model I computer with Level II BASIC, at least 4-Kbytes of memory and an Expansion Interface, or a similarly configured TRS-80\* Model III computer (interface is included).

Sp & SP

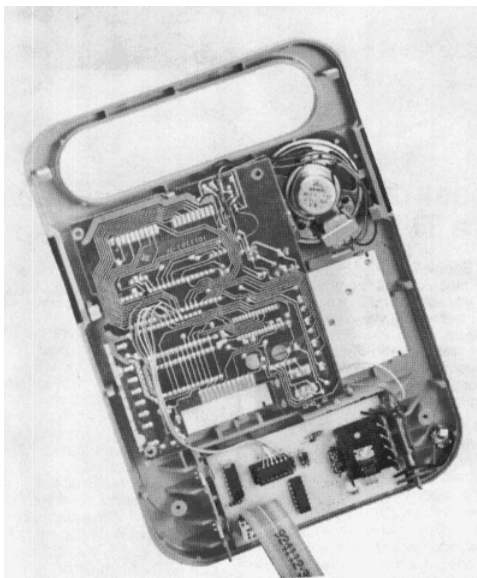

---

### Speak uP Software



John P. Cater

Dear Computerist,

- Remember the HAL-9000 in Kubrik's "2001 - A SPACE ODDESEY" when it sang "Daisy" (Bicycle Built for Two)? Have you ever heard that again on a computer? No? That's because the technology for independently generating speech and musical pitch has been beyond the capabilities of even the most advanced computers.
- The capabilities of the TI "Speak and Spell" , and Speak Up Software give your computer not only the ability of speech, but also (in a fashion), the musical qualities of song which you can hear on the demonstration cassette. And while you may not really be interested in making your home computer sing, the important fact is that you have independent control of pitch and voice. This allows you complete control over intonation and voice pitch.
- The method of speech generation in the Speak Up System is phonetic speech synthesis. This means you type in ASCII symbols corresponding to the sounds of speech. An example is given in the letterhead logo: To make the computer say "Speak" you simply type in S.PEE.K on your keyboard.
- Speak Up Software does not now sell any hardware for this system. This hardware may be purchased from:
- These companies supply the necessary hardware to allow your Speak Up Software to generate phonetically syntthesized speech. Memory requirements for the Speak Up Software are about 2K bytes of RAM. This includes all phonetic storage.and the phonetic drivers. These may be accessed through your own machine language programs or BASIC.

### Hardware

```
Texas Instruments "Speak and Spell"* :  
Any Store (about $60.00)  
  
6502 to "Speak and Spell"* Interface:  
East Coast Micro Products (about $60.00)  
1307 Beltram Court  
Odenton, MD 21113
```

- If you're interested in hearing phonetic speech by LPC synthesis, send \$4.95 to Speak Up Software for the demonstration cassette. Programs are currently available for 6502 systems and in the near future for the TRS-80 . Updates will be published on the TRS-80\*\* program status.
- Act now to get in on the ground floor of Linear Predictive Coding phonetically synthesized speech. Your computer will thank you for the gift of speech!

\* Trademark of Texas Instruments

\*\* Trademark of Radio Shack



- [TI Talking Learning Aid Sets Pace for Innovative CES Introductions](#)
- [Texas Instruments Collection](#)
- [DATAMATH CALCULATOR MUSEUM](#)
- [PROJECT: SPEAK & SPELL TOY \(1976 - 1995\)](#)
- [The Texas Instruments Speak & Spell](#)
- [Texas Instruments: a DSP success](#)
- [TI will exit dedicated speech-synthesis chips, transfer products to Sensory](#)
- [Speak & Spell Shenanigans](#)

---

[Back](#) [Back to](#) Richard Davies NLnet Home Page